

KELLY DUPLEX

6" U-Trough Screw Conveyor
35'-8" long, inclined at 29-1/2 degrees
2 HP drive at 91 RPM, trough shrouds
8" inlet corrected to level; M01004, June 1999




Inlet and discharge

Views illustrate 2 HP SMGR Drive at 91 RPM, 8" flanged inlet corrected for conveyor incline, and hinged maintenance panel with quick acting padlockable clamps and protective interlocking limit switch. The view above illustrates the conveyor discharge corrected for the 29-1/2 degree angle of incline.




KELLY DUPLEX

6" U-Trough Screw Conveyor
35'-8" long, inclined at 29-1/2 degrees
2 HP drive at 91 RPM, trough shrouds
8" inlet corrected to level; M01004, June 1999

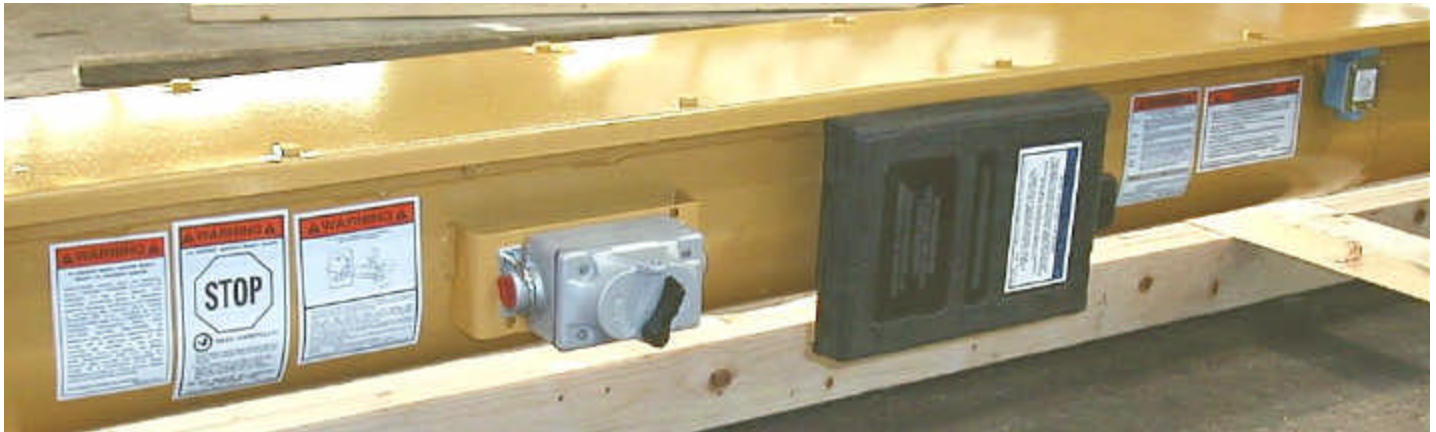

View illustrates conveyor standard accessories: Padlockable Protective Interlocking Electrical Control Switch (PCS), Protective Interlocking Limit Switch (PLS), Operator's Manual Case (OMC), and instruction and hazard warning decals.

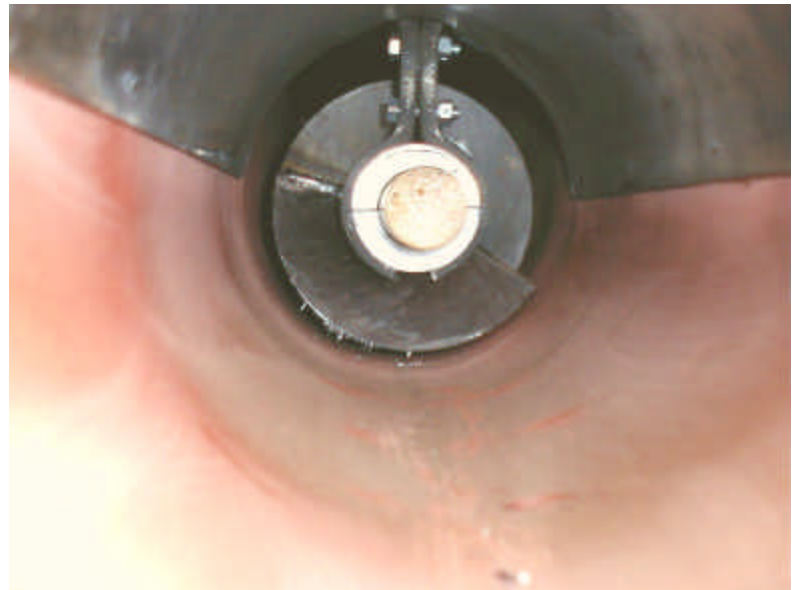

Exterior and interior views illustrate a shroud mounted inside the conveyor U-trough and an intermediate hanger bearing

THE DUPLEX MILL & MANUFACTURING CO.
415 SIGLER ST., P.O. BOX 1266, SPRINGFIELD, OH 45501-1266 USA
Email: sales@dmmc.com Home Page: <http://www.dmmc.com>

TEL: 937/325-5555
FAX: 937/325-0859
FAX: 937/325-2229

IMPORTANT: All illustrations and specifications are subject to change without notice and any drawing dimensions may not be to scale. Machines shown with protective covers, guards, grates, maintenance panels or interlocking limit switches removed are for illustrative purposes only. All protective devices must be in place before power is connected to machine and before operation. All sales are subject to our prevailing terms and General Conditions of Sale. See DMMC #1281-9.
SAFETY IS EVERYONE'S BUSINESS! Safe operations are profitable operations. Write or phone today for your free copy of our publication #369: **KELLY DUPLEX PROCESSING MACHINERY HAZARD WARNINGS.**
© The Duplex Mill & Mfg. Co., 1998

KELLY DUPLEX

6" U-Trough Screw Conveyor
35'-8" long, inclined at 29-1/2 degrees
2 HP drive at 91 RPM, trough shrouds
8" inlet corrected to level; M01004, June 1999

THE DUPLEX MILL & MANUFACTURING CO.

415 SIGLER ST., P.O. BOX 1266, SPRINGFIELD, OH 45501-1266 USA

Email: sales@dmmc.com

Home Page: <http://www.dmmc.com>

TEL: 937/325-5555

FAX: 937/325-0859

FAX: 937/325-2229

IMPORTANT: All illustrations and specifications are subject to change without notice and any drawing dimensions may not be to scale. Machines shown with protective covers, guards, grates, maintenance panels or interlocking limit switches removed are for illustrative purposes only. All protective devices must be in place before power is connected to machine and before operation. All sales are subject to our prevailing terms and General Conditions of Sale. See DMMC #1281-9.

SAFETY IS EVERYONE'S BUSINESS! Safe operations are profitable operations. Write or phone today for your free copy of our publication #369: **KELLY DUPLEX PROCESSING MACHINERY HAZARD WARNINGS.**

© The Duplex Mill & Mfg. Co., 1998

Page 3 of 3